


HONY 3D SHENZHEN HONY OPTICAL CO., LIMITED

ADDRESS: 4th Floor, building A, Jinlaiwang Science Park, Jiayi Industril Zoon, Guiyue Road, Guihua village, Guanlan town,
Baoan District, Shenzhen, China

TEL:0755-29045537 FAX:0755-29045524 Mobile:+86-13420984069

HONY3D-T Parameters

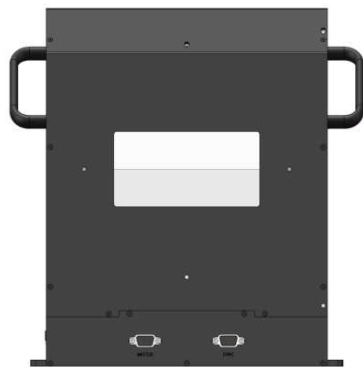

Turbo Screen	Polarizer Dimensions	270*333*108mm
	Optical Principle	Circular Polarization
	Light Transmittance	75%
	Cross talk ratio	<1.5%
	light Efficiency	30%
	contrast Ratio	>150: 1
	Suported Frame Rate	24/48/60 fps
	2D/3D Intelligent Switchover(TMS)	available
	one-click Transposition of left and right picture	available
Silver Screen	Gain coefficient	> 2.4
	Polarization contrast	> 150: 1
Digital Projector	Supported Brands	NEC, Barco, Christie
	Supported Luminance	33000lm
	Dark Time	650us
	Delay time	-200us
Projection Hall	Throw Ratio	1.25:1
	Distance	10~30m